



LONGHORN[®]



BACKEZE

• SHEARING TYPE •


INSTRUCTION BOOKLET

PRODUCTS PARTS CHECKLIST


LONG

Please check that you have all of the parts below before assembling the **BACKEZE**. If you do not, please contact your supplier.


A Female Half x 1

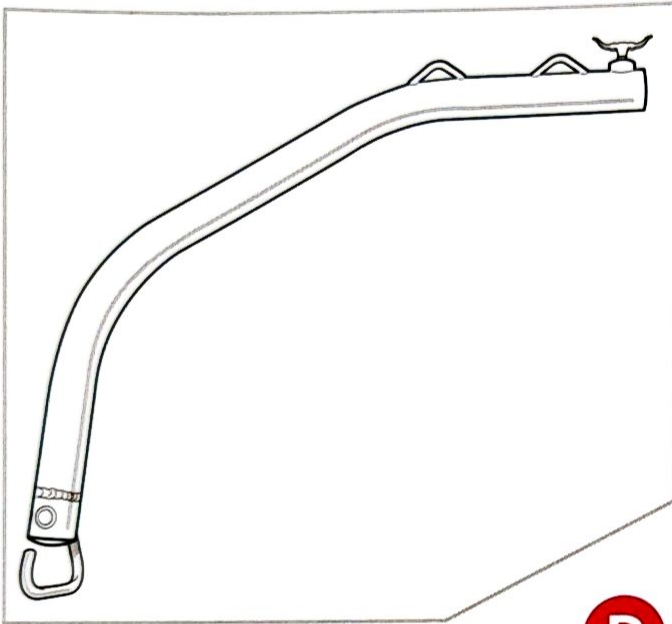


B Male Half x 1

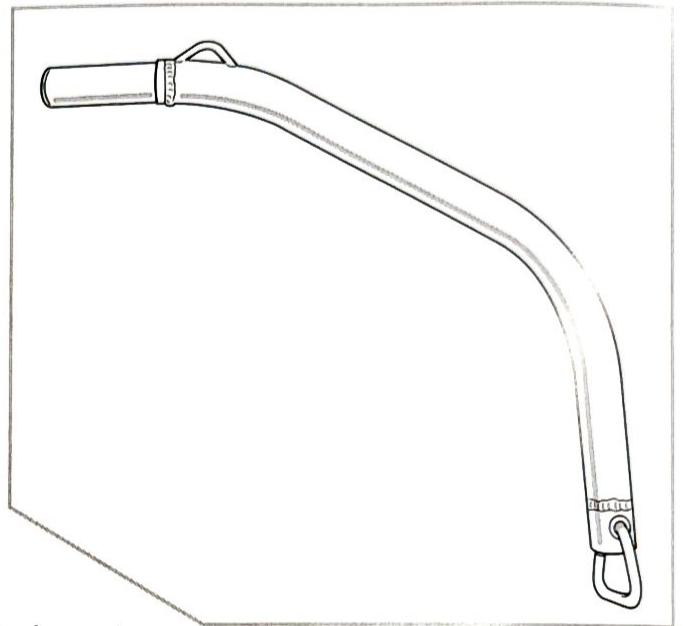


C Top Swivel x 1

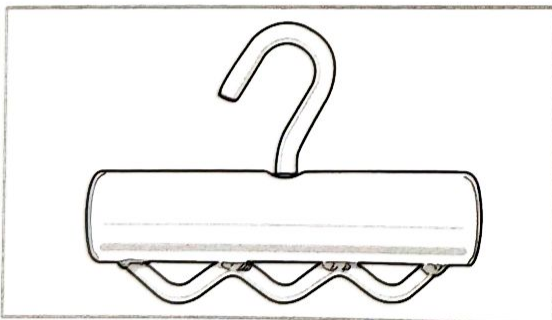


D Belt x 1

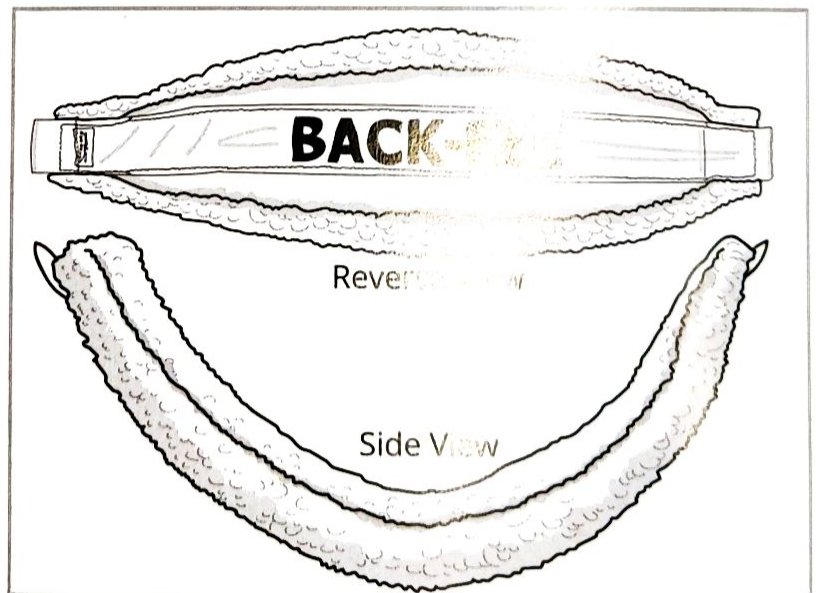


E Springs x 3

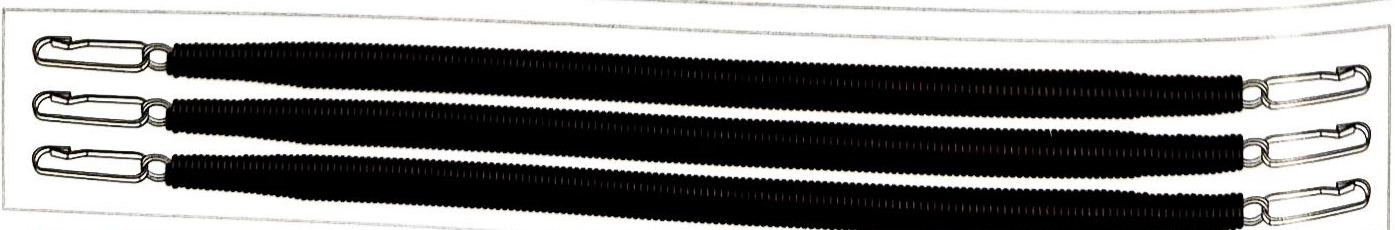


- 1** Locate the female half of the **BACKEZE**.

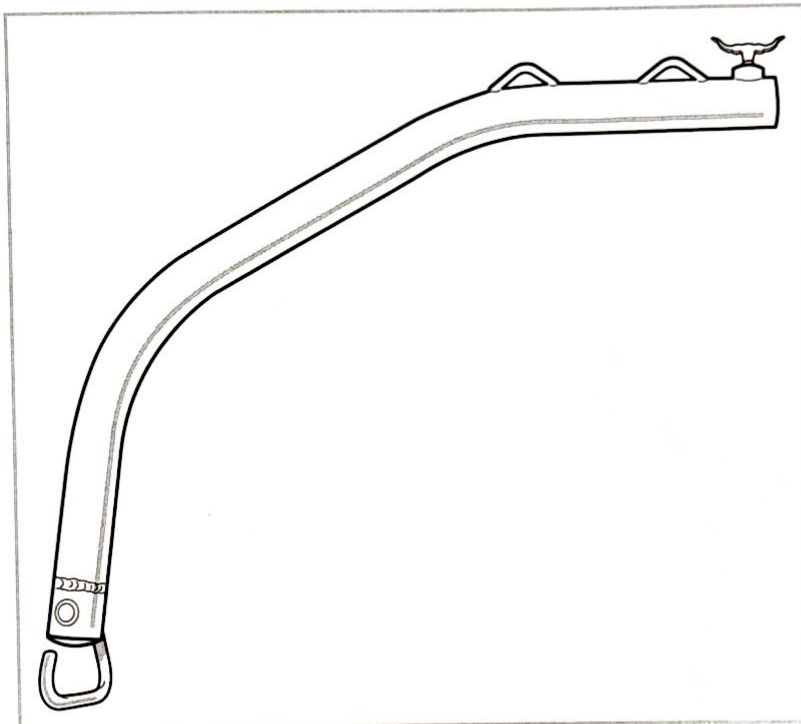


- 2** Release the clamp bolt.

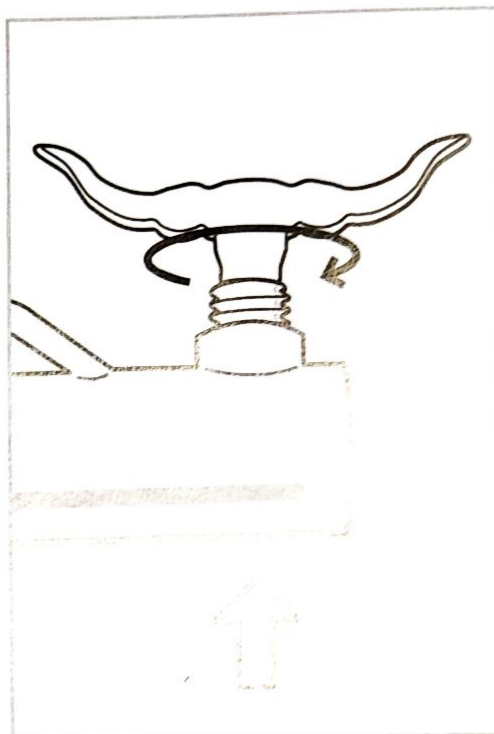


- 3** Insert the male half into the female half, gently.

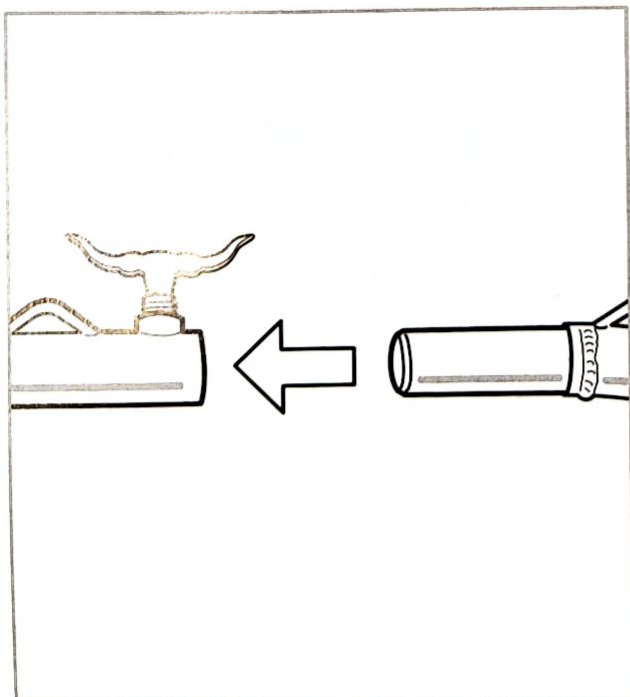


- 4** Secure in place by tightening the clamp bolt.

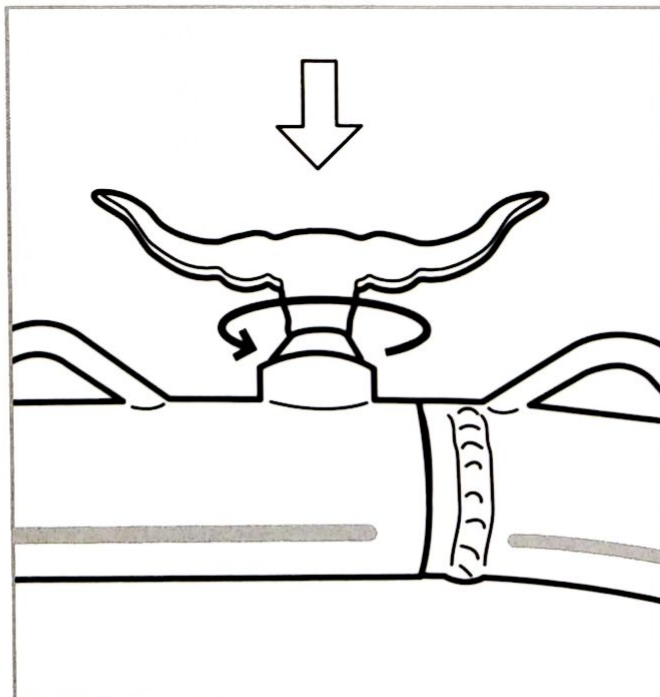


- 5 Using the spring clips, attach the springs to the **BACKEZE** frame.

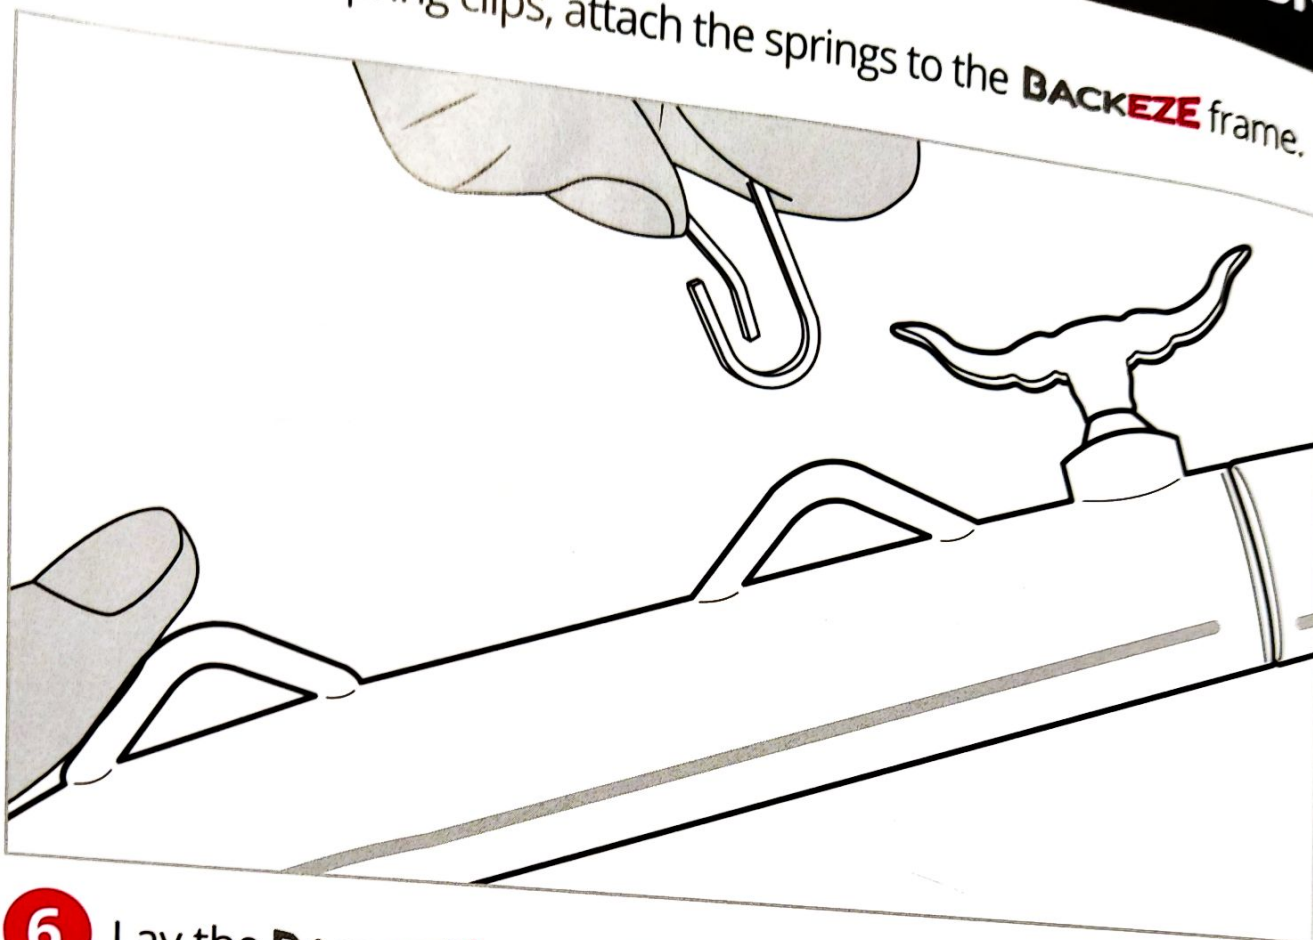


- 6 Lay the **BACKEZE** on the floor and straighten out the springs.

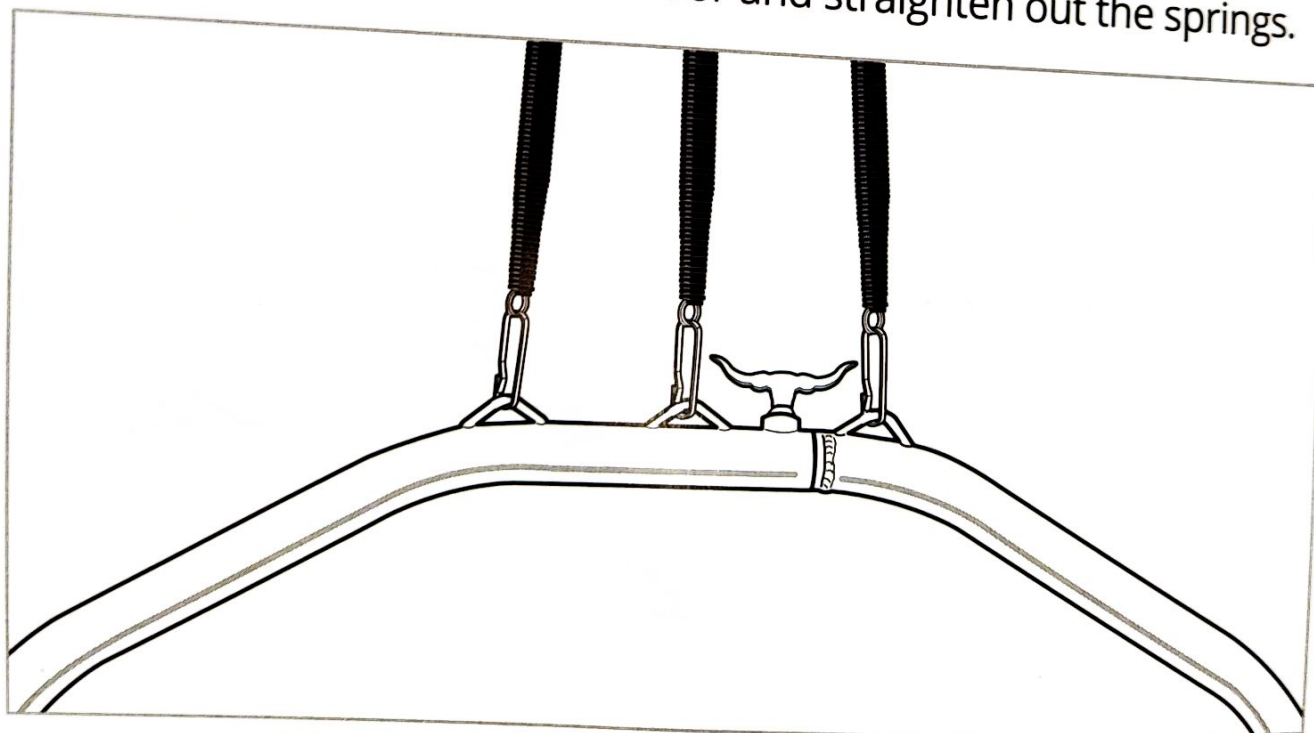

7 Using the same technique from illustration 5, attach the other ends of the springs to the Top Swivel.

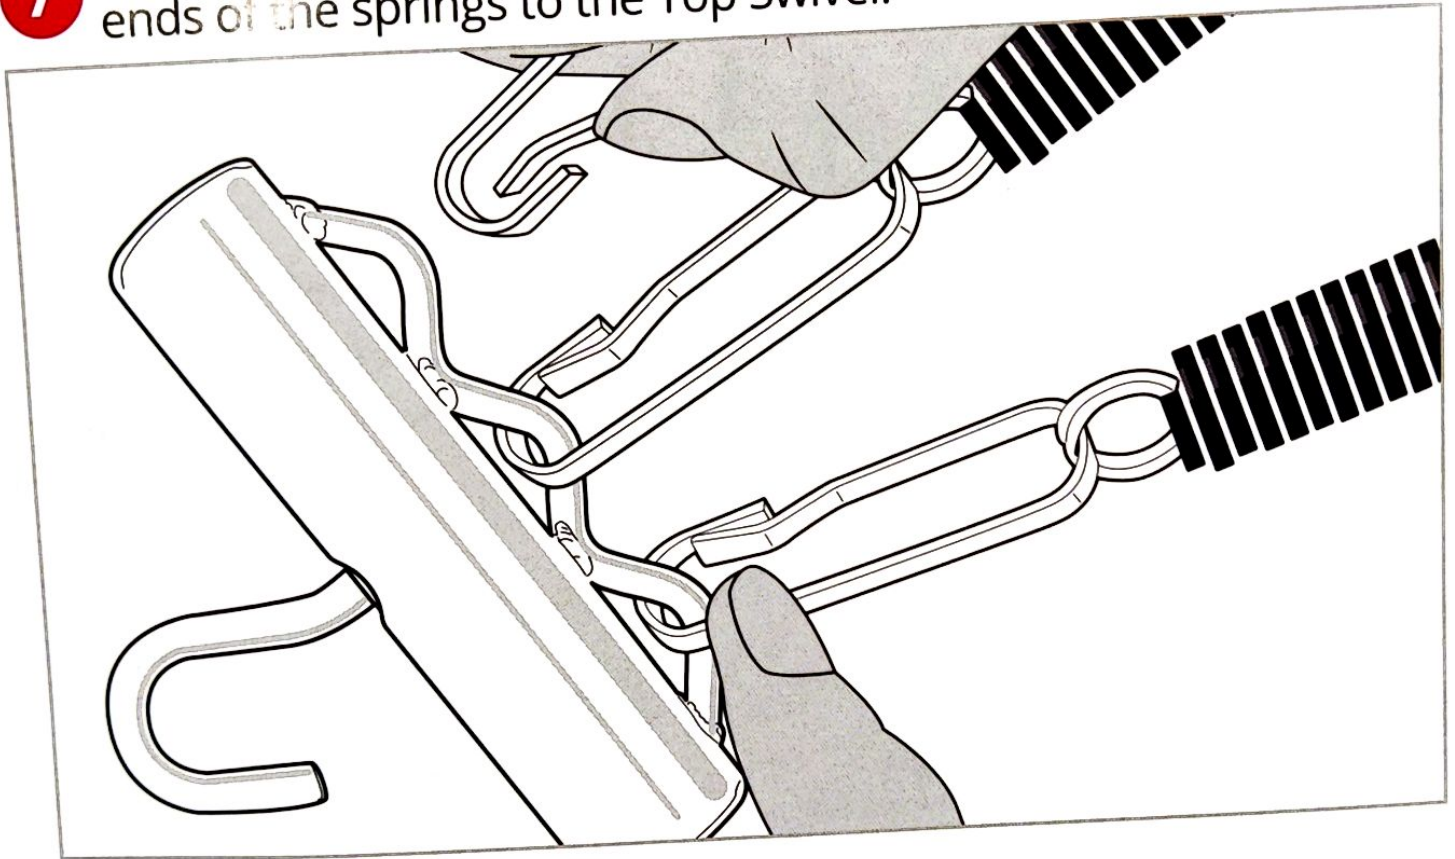


8 Attach the belt to the hangers.


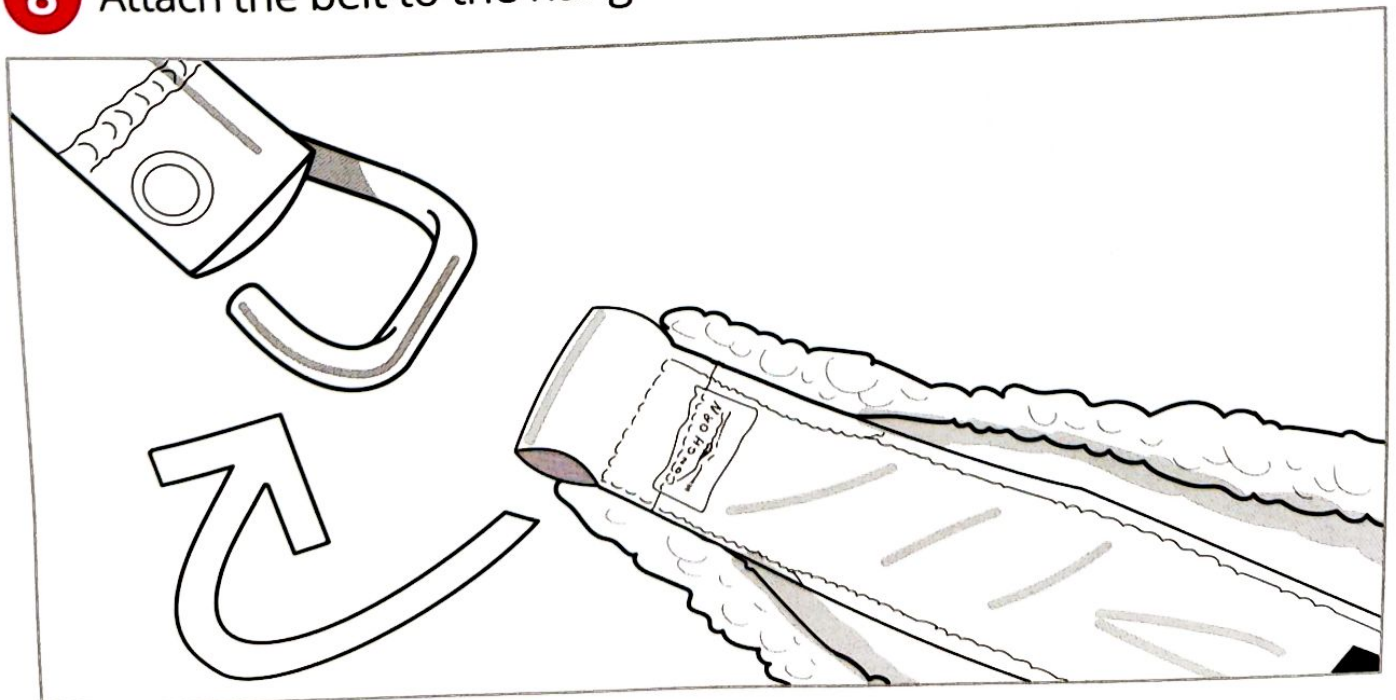


MOUNTING THE BACK-EZE

- 1 Mount the **BACK-EZE** frame so the bottom of the springs are level with the centre of your forehead.

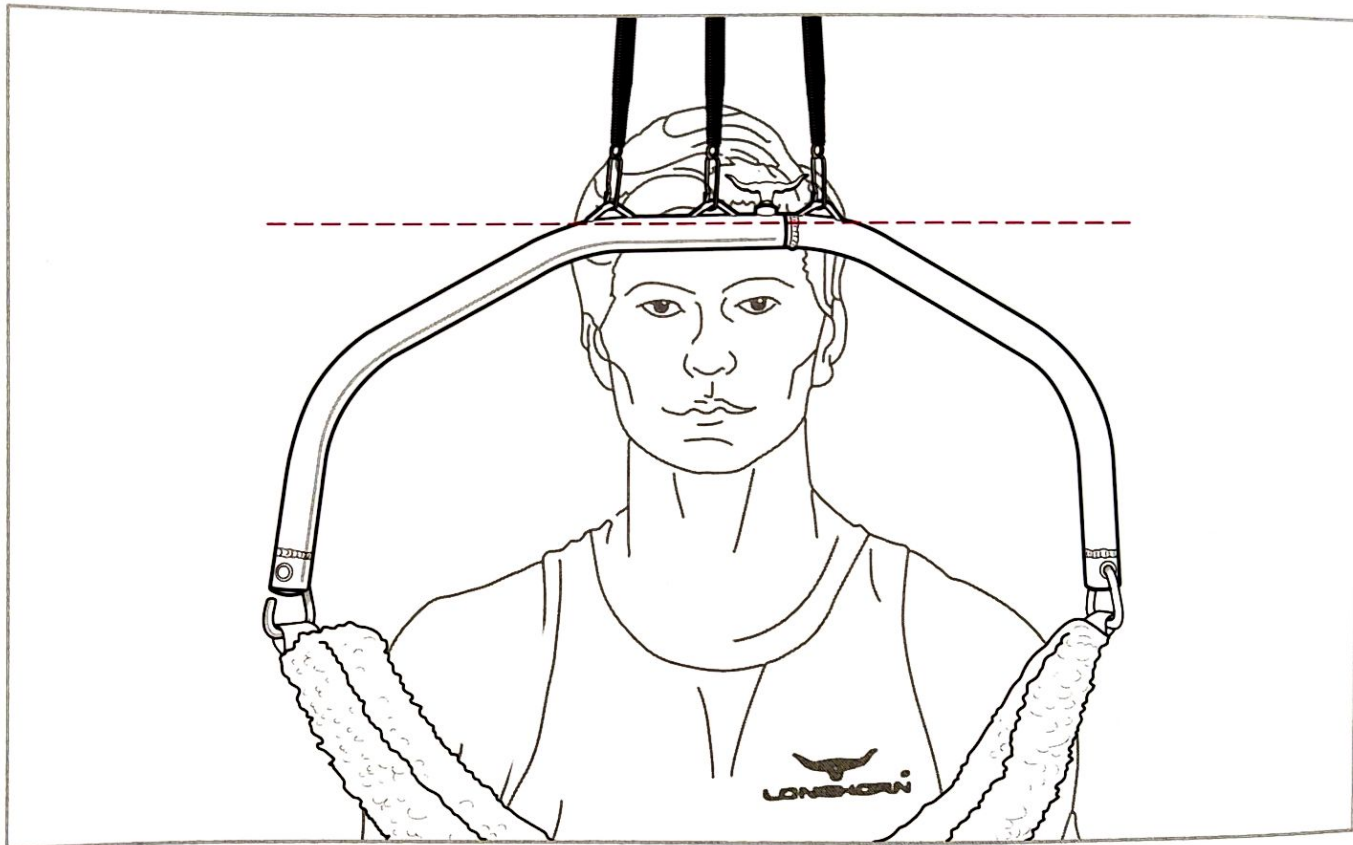


- 2 Rest your chest on the belt.
- 3 Shear in comfort.

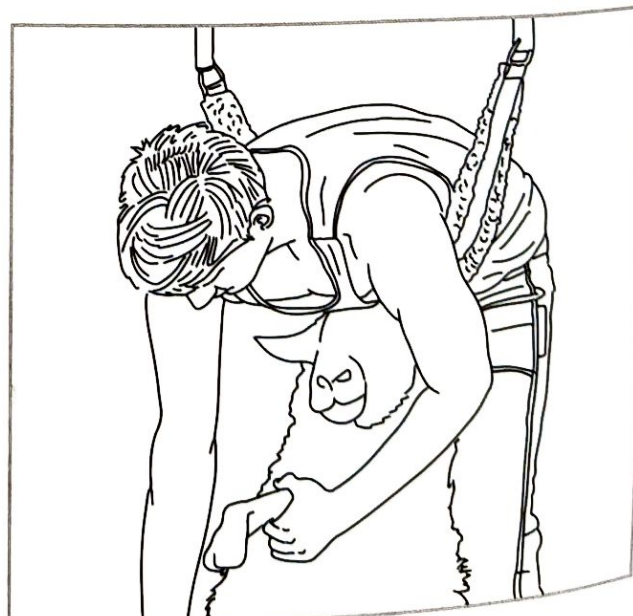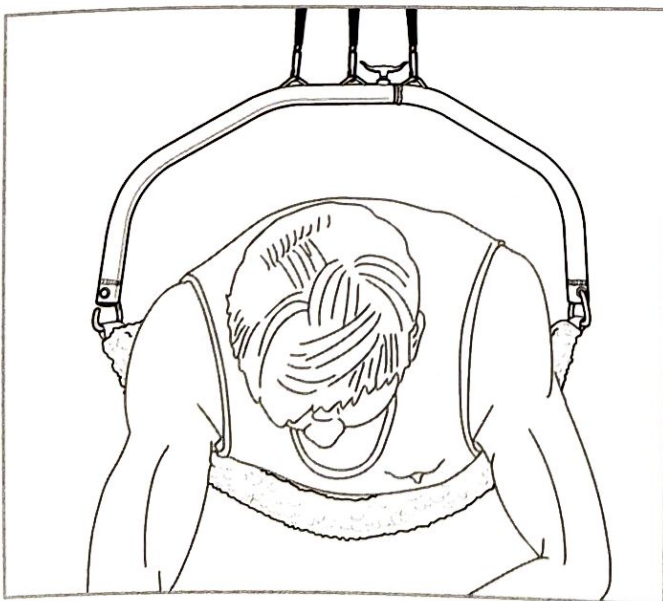


If excessive resistance is felt, the **BACK-EZE** can be used with the middle spring removed.


1 Oil belt hook weekly.

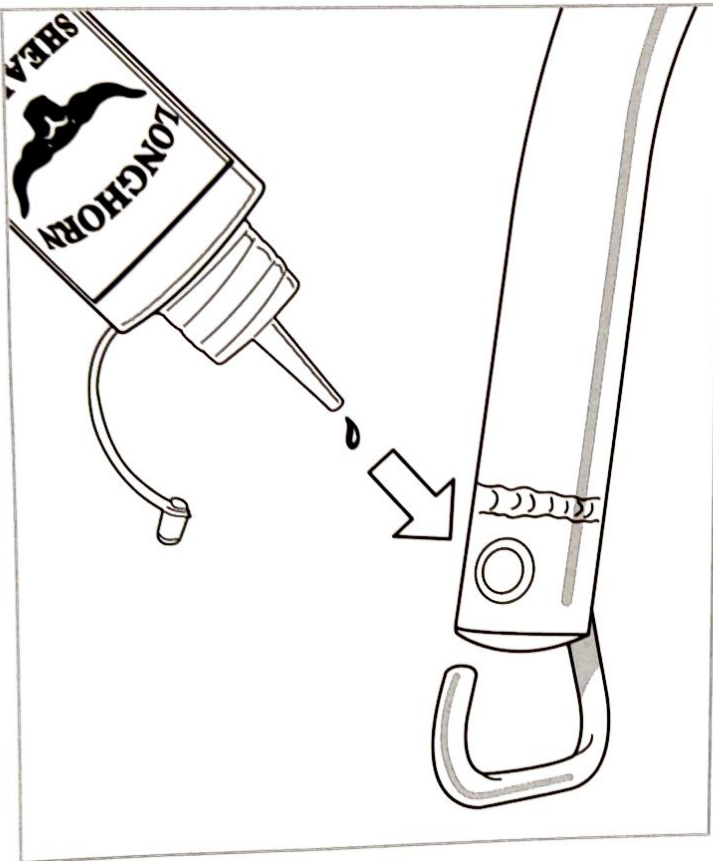


2 Oil clamp bolt weekly.

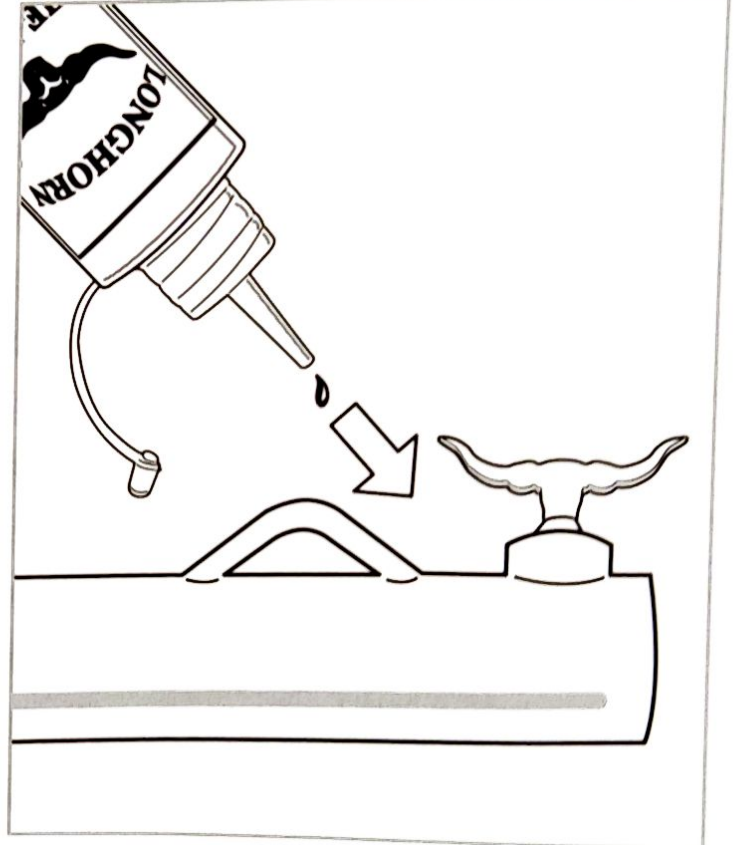

3 Oil top swivel hook weekly.

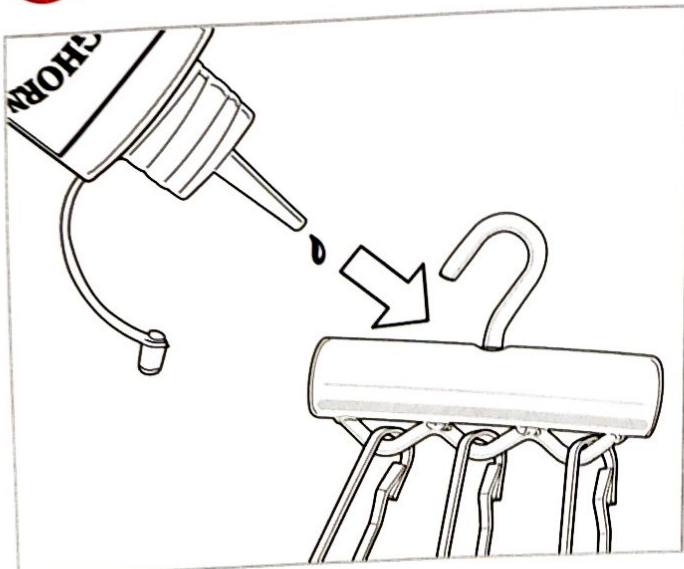

4 Wash belt on low heat wash.

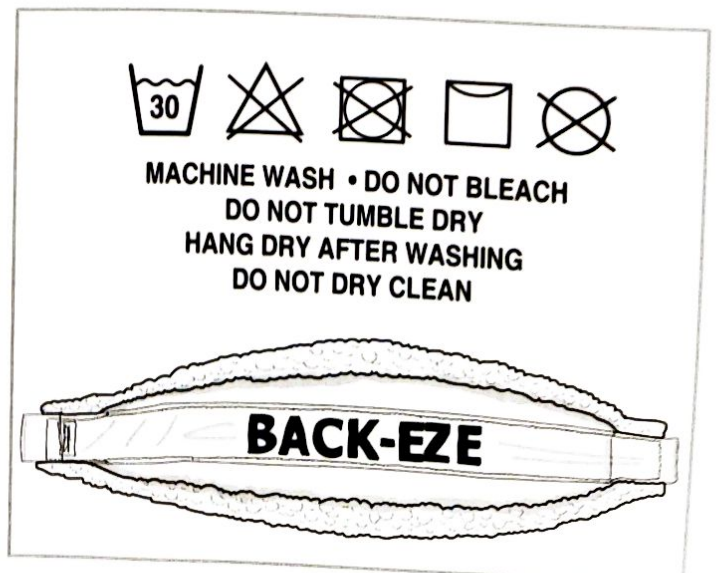


PARTS ORDER LIST




Below are all the parts and part numbers for your **BACK-EZE**.
Please quote the part number when ordering any replacement parts.


A Full Frame x 1

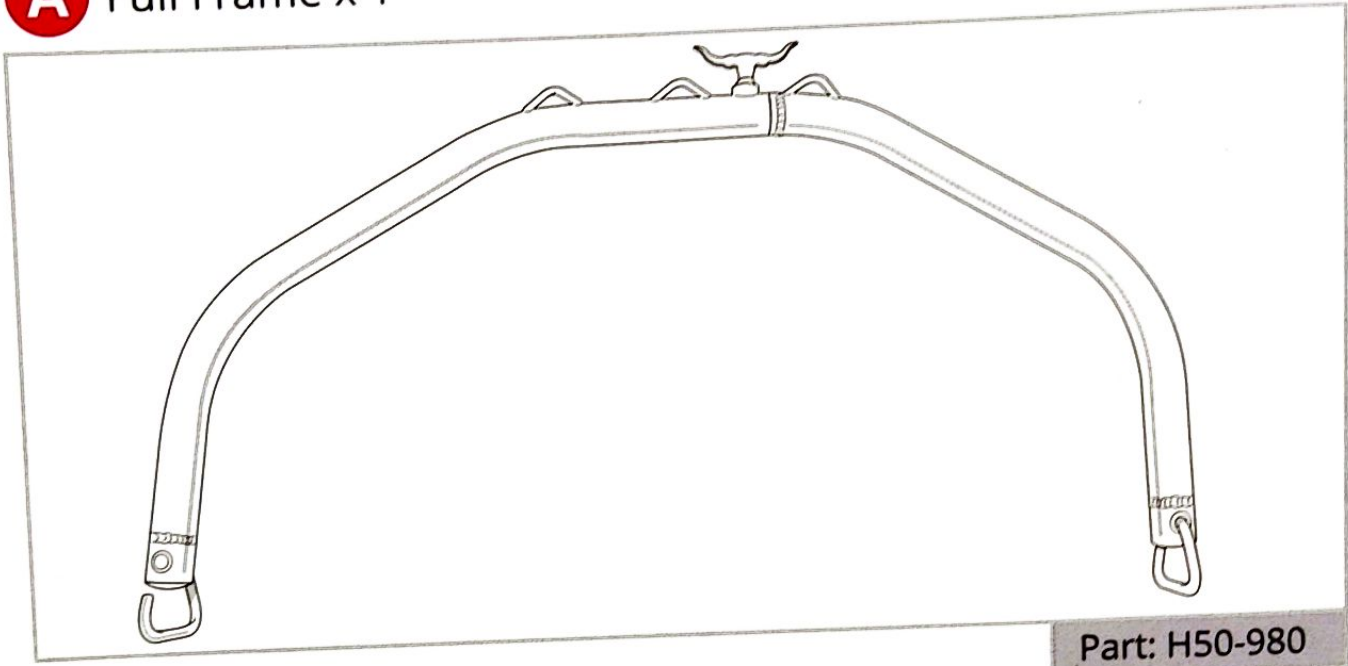


B Top Swivel x 1

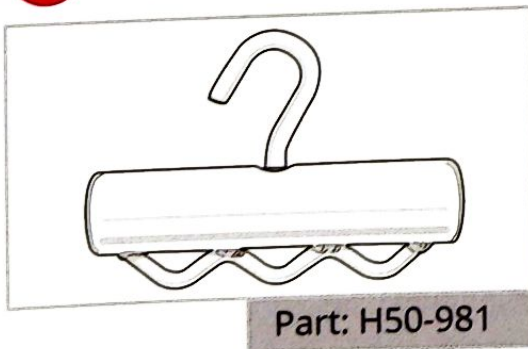

C Belt x 1

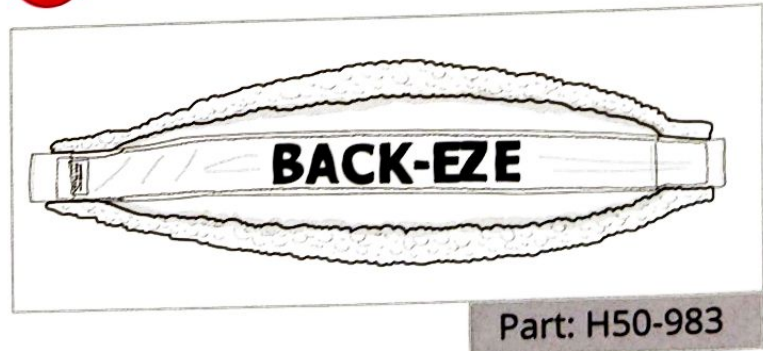

D Springs x 3

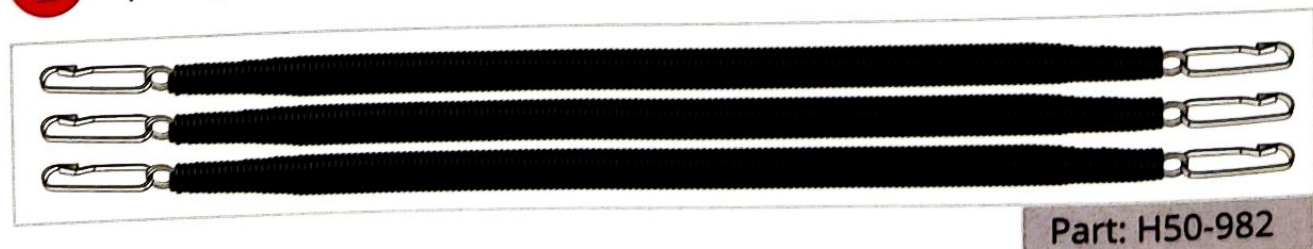

Contact your local distributor for parts